

4. PRODUCTION AND PROPERTIES OF RADIATIONS

curved crystals, and a high brilliance in those experiments that do.

Many surveys of existing and planned synchrotron-radiation sources have been published since the compilation of Table 4.2.1.6. Figure 4.2.1.11, taken from a recent review (Suller, 1992), is a graphical illustration of the growth and the distribution of these sources. An earlier census is due to Huke & Kobayakawa (1989). Many detailed descriptions of beam lines for particular purposes, such as protein crystallography (*e.g.* Fourme, 1992) or at individual storage rings (*e.g.* Kusev, Raiko & Skuratowski, 1992) have appeared: these are too numerous to list here and can be located by reference to *Synchrotron Radiation News*.

4.2.1.6. Plasma X-ray sources

Plasma sources of hard X-rays are being investigated in many laboratories. Most of the material in this section is derived from publications from the Laboratory for Laser Energetics, University of Rochester, USA. Plasma sources of very soft X-rays have been reviewed by Byer, Kuhn, Reed & Trail (1983).

The peak wavelength of emission from a black-body radiator falls into the ultraviolet at about 10^5 K and into the X-ray region between 10^6 and 10^7 K. At these temperatures, matter is in the form of a plasma that consists of highly ionized atoms and of electrons with energies of several keV. The only successful methods of heating plasmas to temperatures in excess of 10^6 K is by means of high-energy laser beams with intensities of 10^{12} W mm⁻² or more. The duration of the laser pulse must be less than 1 ns so that the plasma cannot flow away from the pulse. When the plasmas are created from elements with $15 < Z < 25$, they consist mainly of ions stripped to the *K* shell, that is of hydrogen- and helium-like ions. The X-ray spectrum (Fig. 4.2.1.12) then contains a main group of lines with a bandwidth for the group of about 1%; the band is situated slightly below the *K*-absorption edge of the target material. The intensity of the band drops with increasing atomic number. For diffraction studies, Forsyth & Frankel (1980, 1984) and Frankel & Forsyth (1979, 1985) used a multi-stage

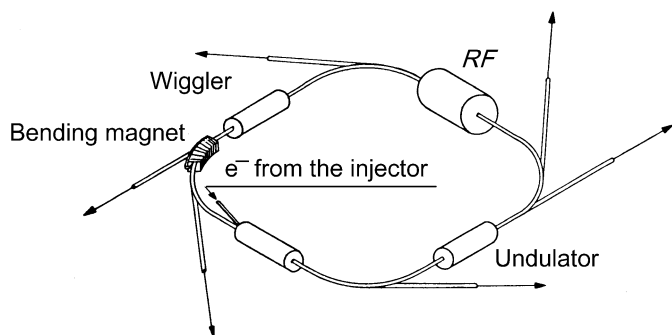


Fig. 4.2.1.7. Main components of a dedicated electron storage-ring synchrotron-radiation source. For clarity, only one bending magnet is shown. From Buras & Tazzari (1984); courtesy of ESRP.




Fig. 4.2.1.8. Electron trajectory within a multipole wiggler or undulator. λ_0 is the spatial period, α the maximum deflection angle, and θ the observation angle. From Buras & Tazzari (1984); courtesy of ESRP.

Nd³⁺:glass laser (Seka, Soures, Lewis, Bunkenburg, Brown, Jacobs, Mourou & Zimmermann, 1980), which was able to deliver up to 220 J per pulse of width 700 ps. They obtained 6×10^{14} photons pulse⁻¹ for a Cl¹⁵⁺ plasma with a mean wavelength of about 4.45 Å and about 3×10^{13} photons pulse⁻¹ for a Fe²⁴⁺ plasma at about 1.87 Å (Yaakobi, Bourke, Conturie, Delettrez, Forsyth, Frankel, Goldman, McCrory, Seka, Soures, Burek & Deslattes, 1981). More recently, the laser was fitted

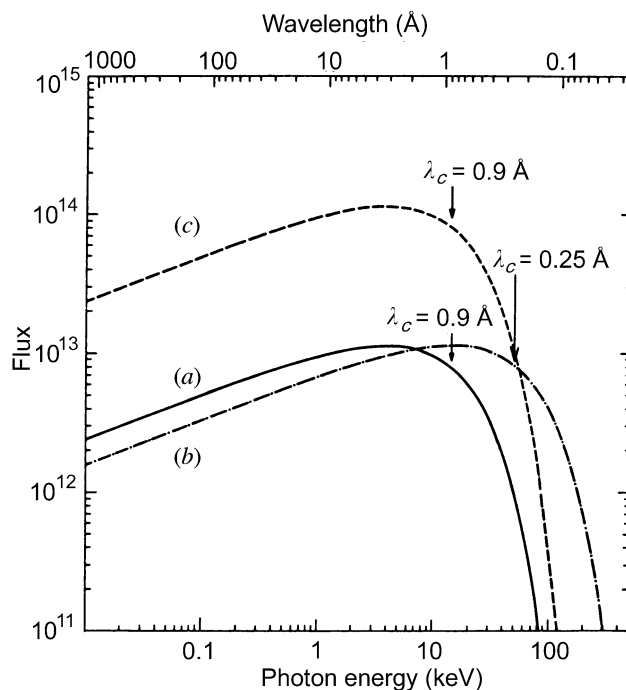


Fig. 4.2.1.9. Spectral distribution and critical wavelengths for (a) a dipole magnet, (b) a wavelength shifter, and (c) a multipole wiggler for the proposed ESRF. From Buras & Tazzari (1984); courtesy of ESRP.

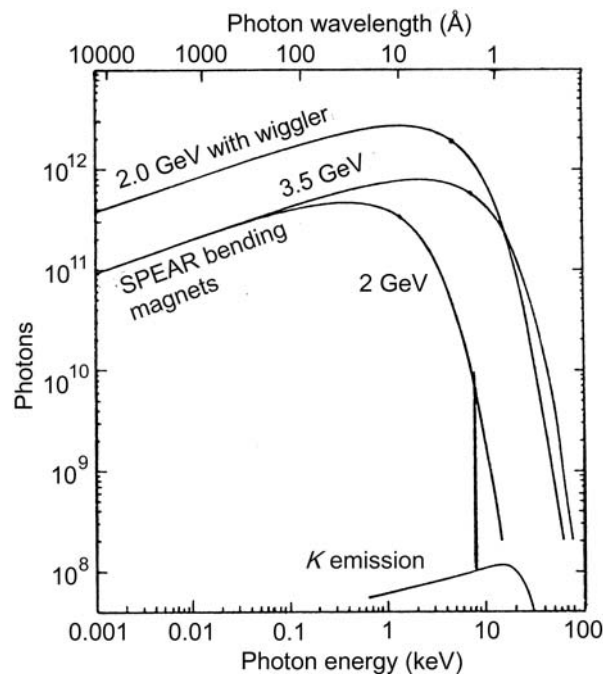


Fig. 4.2.1.10. Comparison of the spectra from the storage ring SPEAR in photons s⁻¹ mA⁻¹ mrad⁻¹ per 1% passband (1978 performance) and a rotating-anode X-ray generator. From Nagel (1980); courtesy of K. O. Hodgson.