


1. TENSORIAL ASPECTS OF PHYSICAL PROPERTIES


1.1.4.9.7.2. Groups $m\bar{3}m$, 432 , $\bar{4}3m$

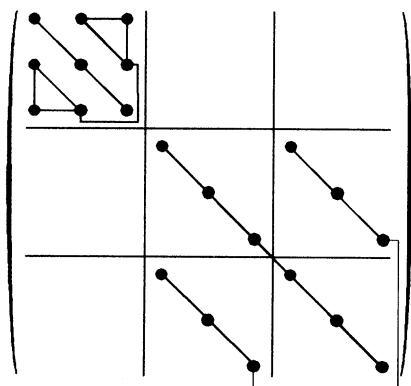

There are 4 independent components. The tensor is symmetric.

1.1.4.9.8. Spherical system

1.1.4.9.8.1. Groups $\infty(A_\infty/M)C$ and ∞A_∞

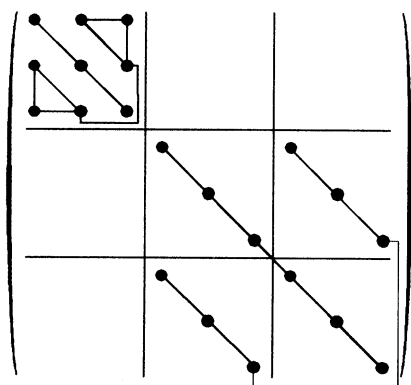

with


$$t_{1111} - t_{1122} = t_{1212} + t_{1221}.$$

There are 3 independent components. The tensor is symmetric.

1.1.4.9.9. Symmetric tensors of rank 4


For symmetric tensors such as those representing principal properties, one finds the following, representing the nonzero components for the leading diagonal and for one half of the others.

1.1.4.9.9.1. Triclinic system

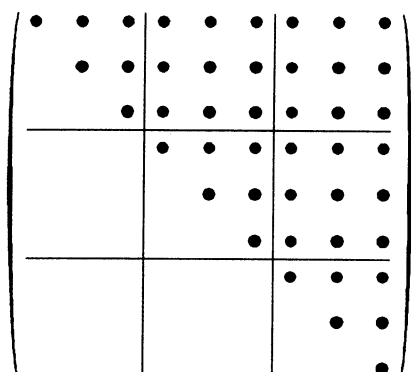


There are 45 independent coefficients.

1.1.4.9.2. Monoclinic system

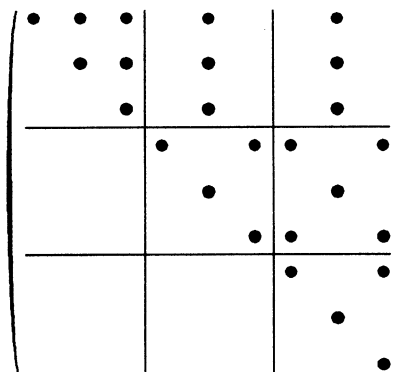

There are 25 independent coefficients.

1.1.4.9.3. Orthorhombic system

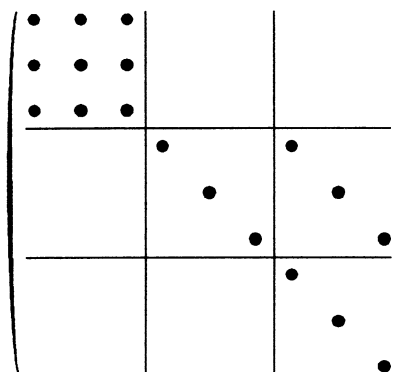

There are 15 independent coefficients.

1.1.4.9.4. Trigonal system

(i) Groups 3 and $\bar{3}$

kl	11	22	33	23	31	12	32	13	21
ij									
11	1111	1122	1133	1123	-2231	1112	1132	-2213	-1112
22		1111	1133	-1123	2231	-1121	-1132	2213	-1112
33			3333			3312			-3312
23				2323	2331	2213	2332		2213
31					3131	1132		2332	1132
12						1212	2231	1123	1221
32							3131	-2331	2231
13								2323	1123
21									1212

with

$$t_{1111} - t_{1122} = t_{1212} + t_{1221}.$$

There are 15 independent components.

1. TENSORIAL ASPECTS OF PHYSICAL PROPERTIES

(ii) Groups $m\bar{3}m$, 432 , $\bar{4}3m$, and spherical system: the reduced tensors are already symmetric (see Sections 1.1.4.9.7 and 1.1.4.9.8).

1.1.4.10. Reduced form of polar and axial tensors – matrix representation

1.1.4.10.1. Introduction

Many tensors representing physical properties or physical quantities appear in relations involving symmetric tensors. Consider, for instance, the strain S_{ij} resulting from the application of an electric field \mathbf{E} (the piezoelectric effect):

$$S_{ij} = d_{ijk}E_k + Q_{ijkl}E_kE_l, \quad (1.1.4.4)$$

where the first-order terms d_{ijk} represent the components of the third-rank converse piezoelectric tensor and the second-order terms Q_{ijkl} represent the components of the fourth-rank electrostriction tensor. In a similar way, the direct piezoelectric effect corresponds to the appearance of an electric polarization \mathbf{P} when a stress T_{jk} is applied to a crystal:

$$P_i = d_{ijk}T_{jk}. \quad (1.1.4.5)$$

Owing to the symmetry properties of the strain and stress tensors (see Sections 1.3.1 and 1.3.2) and of the tensor product E_kE_l , there occurs a further reduction of the number of independent components of the tensors which are engaged in a contracted product with them, as is shown in Section 1.1.4.10.3 for third-rank tensors and in Section 1.1.4.10.5 for fourth-rank tensors.

1.1.4.10.2. Stress and strain tensors – Voigt matrices

The stress and strain tensors are symmetric because body torques and rotations are not taken into account, respectively (see Sections 1.3.1 and 1.3.2). Their components are usually represented using Voigt's one-index notation.

(i) Strain tensor

$$\left. \begin{aligned} S_1 &= S_{11}; & S_2 &= S_{22}; & S_3 &= S_{33}; \\ S_4 &= S_{23} + S_{32}; & S_5 &= S_{31} + S_{13}; & S_6 &= S_{12} + S_{21}; \\ S_4 &= 2S_{23} = 2S_{32}; & S_5 &= 2S_{31} = 2S_{13}; & S_6 &= 2S_{12} = 2S_{21}. \end{aligned} \right\} \quad (1.1.4.6)$$

The Voigt components S_α form a Voigt matrix:

$$\begin{pmatrix} S_1 & S_6 & S_5 \\ & S_2 & S_4 \\ & & S_3 \end{pmatrix}.$$

The terms of the leading diagonal represent the elongations (see Section 1.3.1). It is important to note that the non-diagonal terms, which represent the shears, are here equal to *twice* the corresponding components of the strain tensor. The components S_α of the Voigt strain matrix are therefore *not* the components of a tensor.

(ii) Stress tensor

$$\left. \begin{aligned} T_1 &= T_{11}; & T_2 &= T_{22}; & T_3 &= T_{33}; \\ T_4 &= T_{23} = T_{32}; & T_5 &= T_{31} = T_{13}; & T_6 &= T_{12} = T_{21}. \end{aligned} \right\}$$

The Voigt components T_α form a Voigt matrix:

$$\begin{pmatrix} T_1 & T_6 & T_5 \\ & T_2 & T_4 \\ & & T_3 \end{pmatrix}.$$

The terms of the leading diagonal correspond to principal normal constraints and the non-diagonal terms to shears (see Section 1.3.2).

1.1.4.10.3. Reduction of the number of independent components of third-rank polar tensors due to the symmetry of the strain and stress tensors

Equation (1.1.4.5) can be written

$$P_i = \sum_j d_{ijj}T_{jj} + \sum_{j \neq k} (d_{ijk} + d_{ikj})T_{jk}.$$

The sums $(d_{ijk} + d_{ikj})$ for $j \neq k$ have a definite physical meaning, but it is impossible to devise an experiment that permits d_{ijk} and d_{ikj} to be measured separately. It is therefore usual to set them equal:

$$d_{ijk} = d_{ikj}. \quad (1.1.4.7)$$

It was seen in Section 1.1.4.8.1 that the components of a third-rank tensor can be represented as a 9×3 matrix which can be subdivided into three 3×3 submatrices:

$$\left(\begin{array}{c|c|c} \mathbf{1} & \mathbf{2} & \mathbf{3} \end{array} \right).$$

Relation (1.1.4.7) shows that submatrices **1** and **2** are identical. One puts, introducing a two-index notation,

$$\left. \begin{aligned} d_{ijj} &= d_{i\alpha} \quad (\alpha = 1, 2, 3) \\ d_{ijk} + d_{ikj} \quad (j \neq k) &= d_{i\alpha} \quad (\alpha = 4, 5, 6). \end{aligned} \right\}$$

Relation (1.1.4.7) becomes

$$P_i = d_{i\alpha}T_\alpha.$$

The coefficients $d_{i\alpha}$ may be written as a 3×6 matrix:

$$\left(\begin{array}{ccc|ccc} 11 & 12 & 13 & 14 & 15 & 16 \\ 21 & 22 & 23 & 24 & 25 & 26 \\ 31 & 32 & 33 & 34 & 35 & 36 \end{array} \right).$$

This matrix is constituted by two 3×3 submatrices. The left-hand one is identical to the submatrix **1**, and the right-hand one is equal to the sum of the two submatrices **2** and **3**:

$$\left(\begin{array}{c|c} \mathbf{1} & \mathbf{2} + \mathbf{3} \end{array} \right).$$

The inverse piezoelectric effect expresses the strain in a crystal submitted to an applied electric field:

$$S_{ij} = d_{ijk}E_k,$$

where the matrix associated with the coefficients d_{ijk} is a 9×3 matrix which is the transpose of that of the coefficients used in equation (1.1.4.5), as shown in Section 1.1.1.4.

The components of the Voigt strain matrix S_α are then given by

$$\left. \begin{aligned} S_\alpha &= d_{iik}E_k \quad (\alpha = 1, 2, 3) \\ S_\alpha &= S_{ij} + S_{ji} = (d_{ijk} + d_{jik})E_k \quad (\alpha = 4, 5, 6). \end{aligned} \right\}$$

This relation can be written simply as

$$S_\alpha = d_{\alpha k}E_k,$$

where the matrix of the coefficients $d_{\alpha k}$ is a 6×3 matrix which is the transpose of the $d_{i\alpha}$ matrix.

There is another set of piezoelectric constants (see Section 1.1.5) which relates the stress, T_{ij} , and the electric field, E_k , which are both intensive parameters:

$$T_{ij} = e_{ijk}E_k, \quad (1.1.4.8)$$

where a new piezoelectric tensor is introduced, e_{ijk} . Its components can be represented as a 3×9 matrix: