

## 3. CIF DATA DEFINITION AND CLASSIFICATION

## 3.7.2.2. Array elements

Data items in this category are as follows:

```
ARRAY_ELEMENT_SIZE
• _array_element_size.array_id
  → _array_structure.id
• _array_element_size.index
  → _array_structure_list.index
  _array_element_size.size
```

The bullet (•) indicates a category key. The arrow (→) is a reference to a parent data item.

The value of the \_array\_element\_size.size data item is a size in metres of an image element (a pixel or voxel). The direction of the measurement is given in each dimension by \_array\_element\_size.index. The array structure specifying the organization of the dimensions is referenced by the value of \_array\_element\_size.array\_id, which is a pointer to \_array\_structure.id. The value of \_array\_element\_size.index is a pointer to \_array\_structure\_list.index. For data organized into rectangular arrays of pixels or voxels, this gives the spatial dimensions of the individual image elements.

## 3.7.2.3. Intensities

Data items in this category are as follows:

```
ARRAY_INTENSITIES
• _array_intensities.array_id
  → _array_structure.id
• _array_intensities.binary_id
  → _array_data.binary_id
  _array_intensities.gain
  _array_intensities.gain_esd
  _array_intensities.linearity
  _array_intensities.offset
  _array_intensities.overload
  _array_intensities.scaling
  _array_intensities.undefined_value
```

The bullet (•) indicates a category key. The arrow (→) is a reference to a parent data item.

The relationship between the data values for individual image elements and the number of incident photons can be complex. The data items in the ARRAY\_INTENSITIES category provide information about this relationship. The value of \_array\_intensities.linearity states the type of relationship, and the values of \_array\_intensities.array\_id and \_array\_intensities.binary\_id identify the array structure and the image being discussed. The other items are used in different ways depending on the relationship. If the value of \_array\_intensities.linearity is *raw*, then the image elements hold uninterpreted raw data values from the detector, *e.g.* for calibration. If the value of \_array\_intensities.linearity is *linear*, then the count in an image element is proportional to the incident number of photons by the value of \_array\_intensities.gain. The standard uncertainty (estimated standard deviation) of the gain may be given in \_array\_intensities.gain\_esd. The value used for this should be estimated from a good understanding of the physical characteristics of the experimental apparatus. If the value of \_array\_intensities.linearity is *offset*, then the value of \_array\_intensities.offset should be added to the image element value. If the value of \_array\_intensities.linearity is *scaling*, *scaling\_offset*, *sqrt\_scaled* or *logarithmic\_scaled*, the necessary scaling factor is given by the value of \_array\_intensities.scaling. In all cases, the scaling factor is applied to the image element value before the other operations are applied. In the first case, only simple scaling is used. In the second case, the value of \_array\_intensities.offset is added after

scaling. In the third case, the scaled value is squared. In the final case, 10 is taken to the power given by the scaled value.

## 3.7.2.4. Organization and encoding of array data

Data items in these categories are as follows:

```
(a) ARRAY_STRUCTURE
• _array_structure.id
  _array_structure.byte_order
  _array_structure.compression_type
  _array_structure.encoding_type

(b) ARRAY_STRUCTURE_LIST
• _array_structure_list.array_id
• _array_structure_list.index
  → _array_structure.id
  _array_structure_list.axis_set_id
  _array_structure_list.dimension
  _array_structure_list.direction
  _array_structure_list.precedence

(c) ARRAY_STRUCTURE_LIST_AXIS
• _array_structure_list_axis.axis_id
  → _axis.id
• _array_structure_list_axis.axis_set_id
  → _array_structure_list.axis_set_id
  _array_structure_list_axis.angle
  _array_structure_list_axis.angle_increment
  _array_structure_list_axis.angular_pitch
  _array_structure_list_axis.displacement
  _array_structure_list_axis.displacement_increment
  _array_structure_list_axis.radial_pitch
```

The bullet (•) indicates a category key. The arrow (→) is a reference to a parent data item.

The data items in the ARRAY\_STRUCTURE category show how the stream of octets in a binary image is to be reorganized into words of an appropriate size. Each possible encoding is identified by a value of \_array\_structure.id. In most cases, large images will have been compressed. The type of compression used is given by \_array\_structure.compression\_type. Once a stream of octets has been decompressed, it can be organized into words. The type of each word is given by the value of \_array\_structure.encoding\_type and the order of mapping octets onto words, most significant octet first ('big-endian') or least significant octet first ('little-endian'), is given by the value of \_array\_structure.byte\_order.

The data items in the ARRAY\_STRUCTURE\_LIST category show how the list of words defined by the ARRAY\_STRUCTURE category should be organized into image arrays. The value of \_array\_structure\_list.array\_id is a pointer to \_array\_structure.id. Each dimension (row, column, sheet *etc.*) of the image is identified by an index, counting from 1, given by \_array\_structure\_list.index. The order of nesting of the indices is given by the values of \_array\_structure\_list.precedence, with the index of precedence 1 varying most rapidly (*i.e.* having values stored sequentially). The direction of index change for increasing memory location is given by the value of \_array\_structure\_list.direction. For a given index, the number of image elements in that direction is given by the value of \_array\_structure\_list.dimension.

Data items in the ARRAY\_STRUCTURE\_LIST\_AXIS category describe the physical settings of sets of axes for the centres of pixels that correspond to data points described in the ARRAY\_STRUCTURE\_LIST category.

In the simplest cases, the physical increments of a single axis correspond to the increments of a single array index. More complex organizations (*e.g.* spiral scans) may require coupled motions along multiple axes.

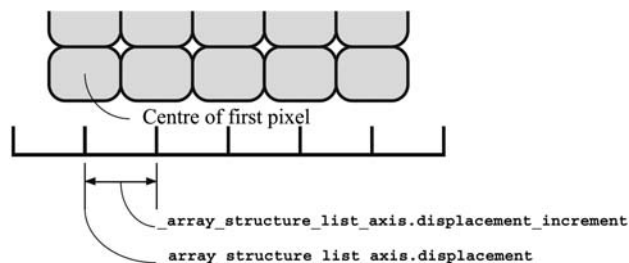


Fig. 3.7.2.1. ARRAY\_STRUCTURE\_LIST specification of linearly organized image elements.

Note that a spiral scan uses two coupled axes, one for the angular direction and one for the radial direction. This differs from a cylindrical scan for which the two axes are not coupled into one set.

Multiple related axes are gathered together into sets. Each set is identified by the value of the axis set identifier, `_array_structure_list_axis.axis_set_id`, and each axis within a set is identified by the value of `_array_structure_list_axis.axis_id`. Each set given by a value of `*.axis_set_id` is linked to a corresponding value for `_array_structure_list.axis_set_id` to relate settings of the axes in the axis set to particular image elements in ARRAY\_STRUCTURE\_LIST.

If axes are all independent, no value need be given for `_array_structure_list_axis.axis_set_id`, which is then implicitly given the corresponding value of `_array_structure_list_axis.axis_id`. Each axis given by a value of `_array_structure_list_axis.axis_id` is linked to a corresponding value for `_axis.id` to provide a physical description of the axis. `_array_structure_list_axis.axis_id` and `_array_structure_list_axis.axis_set_id` together uniquely identify a row of data in an ARRAY\_STRUCTURE\_LIST\_AXIS table.

For the remaining data items, there are two important cases to consider: axes that step by Euclidean distance and axes that step by angle. Fig. 3.7.2.1 shows a portion of an array of image elements laid out on a rectangular grid. The starting point of an axis is specified in millimetres by the value of `_array_`

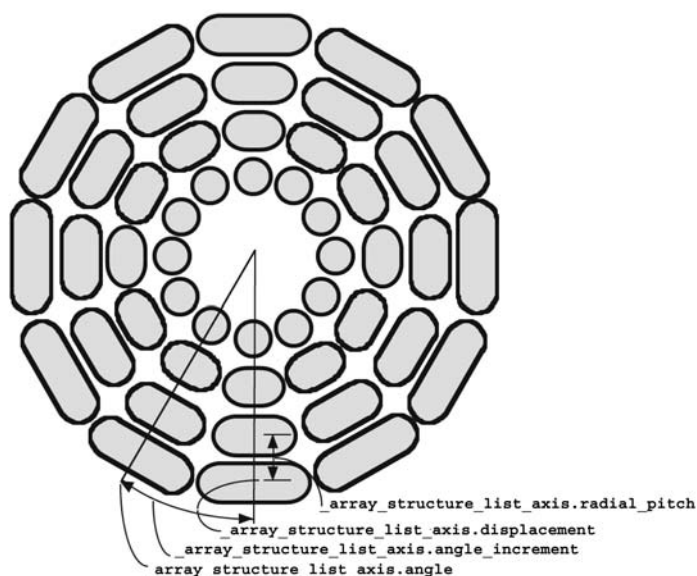


Fig. 3.7.2.2. ARRAY\_STRUCTURE\_LIST specification of 'constant-angle' image elements in a cylindrical scan. The angular and radial axes are independent. Note that outer-zone image elements are further apart, centre-to-centre, than inner-zone image elements.

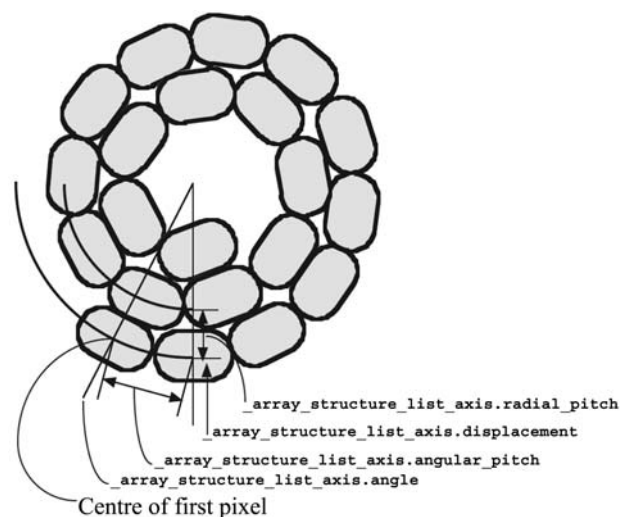


Fig. 3.7.2.3. ARRAY\_STRUCTURE\_LIST specification of 'constant-velocity' image elements in a cylindrical scan. The angular and radial axes are coupled. Note that outer-zone image elements are the same linear distance apart, centre-to-centre, as the inner-zone image elements.

`structure_list_axis.displacement` and the centre-to-centre distance between pixels is specified in millimetres by the value of `_array_structure_list_axis.displacement_increment`.

Fig. 3.7.2.2 shows a portion of an array of image elements laid out in concentric cylinders. The starting point of the angular axis is specified in degrees by the value of `_array_structure_list_axis.angle` and the centre-to-centre angular distance between pixels is specified in degrees by the value of `_array_structure_list_axis.angle_increment`. The starting point of the radial axis is specified by the value of `_array_structure_list_axis.displacement` and the radial distance between cylinders of pixels is specified in millimetres by the value of `_array_structure_list_axis.radial_pitch`. Note that the image elements further from the centre are larger than the image elements closer to the centre.

Fig. 3.7.2.3 shows a portion of a spiral scan array in which the angular and radial axes are coupled. This example represents a 'constant-velocity' scan, in which the size of the image elements does not depend on the distance from the centre. The starting point of the angular axis is again specified in degrees by the value of `_array_structure_list_axis.angle`, but the centre-to-centre distance between pixels is specified in millimetres by the value of `_array_structure_list_axis.angular_pitch`. The coupled radial axis is handled in much the same way as for the uncoupled radial axis in the cylindrical array.

These examples show some of the more common two-dimensional data structures. By coupling an additional axis not in the plane of the first two, regular three-dimensional arrays of data can be represented without additional tags. The categories in the DIFFRN group allow arrays of data to be associated with frames and thereby with time and/or wavelength. More general data structures, for example ones based on dope vectors or hash tables, would require the definition of additional tags, but any data structure (see Aho *et al.*, 1987) that can be handled by a modern computer should be manageable within this framework.

### 3.7.3. Axes

The category describing the axes required to specify the data collection is as follows:

```

AXIS group
  AXIS
  
```